CANOVATE®



INORAX-ECO SERVER CABINET

Inorax-ECO is a cost effective server rack cabinet line designed for cost sensitive customers. It fulfills high density cabling requirements and offers advanced fiber and copper cable management options. A wide range of cable management accessories is available to ensure perfect management of copper, fiber cables and 19" equipment. Flat-pack option enables savings up to 60% in the transport cost and warehouse space.

Technical Features

| Material | 1-1,2-1,5-2mm Steel | | | | |
|------------------------|---------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Color | RAL 7035 or RAL 9005 | | | | |
| Compliance | RoHS, UL Certified | | | | |
| Packaging | Assembled or unassembled | | | | |
| Maximum Static Load | Up to 600 kg. | | | | |
| Finish | Frame, doors, side panels, top and bottom covers. Electrostatic Powder Paint, 19" mounting rails: Zinc-plated | | | | |

Standard Configuration

- Perforated front and rear doors, Free Air Ratio (FAR): %65
- Front & rear doors with swing handle Multi point-espagnolette
- Solid Side Panels with cylindrical locks and latches
- Internal top sheet with 1 entry and fan cut-outs
- 2 Pairs of depth adjustable heavy duty 19" Mounting Rails
- 2 Pairs of Adjustable Feet
- Bottom cover with 1 cable entry


















CANOVATE®


Technical Drawing










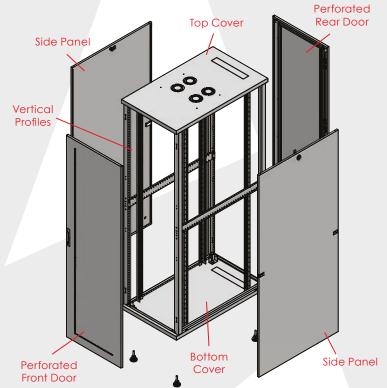

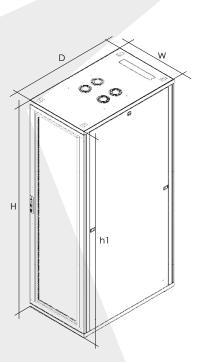

Order Information

| Height U | Outer Width (W) mm | Outer Depth (D) mm | Outer Height (H) mm | Inner Width (w1) mm | Inner Depth (d1) mm | Inner Height (h1) mm | 19" Rails Adjustable Depth Range (c) | Weight kg | Part No |
|-------------|--------------------------|--------------------------|---------------------------|------------------------|------------------------|-------------------------|-----------------------------------------|--------------|---------------|
| 26U | 600 | 1000 | 1309 | 472 | 835 | 1269 | 123 - 773 | 84 | CSS-U-X-2660A |
| 36U | 600 | 1000 | 1753 | 503 | 835 | 1607 | 123 - 773 | 105 | CSS-U-X-3660A |
| 42U | 600 | 1000 | 2000 | 503 | 835 | 1873 | 123 - 773 | 117 | CSS-U-X-4260A |

X (Color code): 7:RAL 7035 Light Grey, 9:RAL 9005 Black